

MOVFR DOOR OPERATOR

The fastest, easiest, quietest, and most dependable door operator ever available from GAL is now even better. If you are not installing MOVFR Operator, you don't know how good a door operator can be.

Door Control with built-in diagnostics.

Parameter Unit gives you the information now in plain English. Capable of holding 5 complete sets of parameters. Contractors can store one working set and all 4 GAL defaults (SS / 2 SP / CP / 2SPCP)

Optional 'heavy door' input. Now you can maximize door performance and still meet the kinetic energy requirements found in ASME A17.1 - 2000 + codes.

Plug & Play Door Protection. No longer a need to locate, mount, or wire a power supply on the car top. GAL offers Formula Systems and Tri-tronics edges at very attractive prices. Edges bought from GAL plug directly into MOVFR operator, saving hours on installation.

Closed Loop regulated speed via motor performance feedback. Perfect consistency from floor to floor, automatically adjusts for wind and door conditions.

Keypad Programming allows complete control for all speeds, torques, acceleration, and deceleration. Download all operating parameters for one operator for easy upload to all others. Incredibly fast and easy fine tuning, especially on multi-car banks.

LED indication of all inputs and outputs. Mechanic friendly. Eliminates time spent trouble-shooting. LED indication for every speed zone during open and close cycles.

Parameter Unit



Test Switches for open, close, nudging and heavy door. Allows testing of the mechanical set up before running on automatic.

Three Input Cards supplied: Door Open, Door Close and Nudging. Minimizes wiring time. Option available: Heavy Door.

Universal Voltage Inputs will accept 24 to 300 volts, AC or DC. Can adapt to the output of virtually any elevator control. Perfect for modernizations.


Heavy Duty 1/2 HP motor. Can handle any application.

Non Contact optical sensor (with available spare for extra functions). Substantially lowers routine maintenance.

Water Resistant model available. Controls encased to gasketed housing. Motor rated for 'wash down' duty. Water resistant grommets for all wiring.

Revised Box Design affords more room for wiring. Increased box width improves attaching and routing field wiring. Raised lip contains wires inside box enclosure better protecting wiring now run in larger clips.

Drives Available: 220 vac / 115 vac

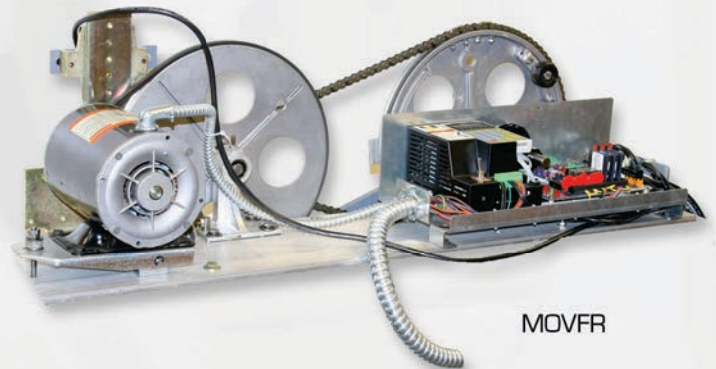

GAL Manufacturing Corp.
50 E. 153rd St., Bronx, NY 10451
Phone: (718) 292-9000
Fax: (718) 292-2034
Web: www.GAL.com
Email: Info@GAL.com



GAL Canada
6500 Gottardo Ct., Mississauga, ON L5T 2A2
Phone: (416) 747-7976
Fax: (416) 747-9035
Web: www.GALCanada.com
Email: InfoGALCanada@GAL.com